

# GÜL PAKET ET REYONU


## Packed Meat Cabinet




Her metrekaredeki mağazanızda paketlenmiş et ürünlerini teşhir etme amaçlı kullanılan GÜL PAKET ET, zengin teşhiri ile sizlere profesyonel çözümler sunmaktadır. Soğutma sistemi hava sirkülasyonlu olup yüksek performansa sahiptir. Gövde komple 40 kg/m<sup>3</sup> yoğunlukta enjeksiyon poliüretandır. Taban teşhir alanı ve hava emiş kanalı AISI 304 kalite paslanmaz çelikten üretilmiştir. Ayarlanabilir kademeli blok raflar sayesinde isteğe bağlı kullanılabilme imkanı sağlar. Alt baza yüksekliği 300 mm olup geniş iç hacme sahiptir. Gece perdesi sayesinde enerji tasarrufu sağlar. Elektronik kontrol panosu çok fonksiyonludur. Ön dekorda koruyucu PVC tampon mevcuttur.

GÜL PAKET ET with its high inner capacity, presents the maximum display capability and offers professional solutions for all kind of pre-packaged meat products in limited display areas. Refrigerating system is air-circulated and puts forward high performance. Whole body is 40 kg/m<sup>3</sup> densitive injection polyurethane. Base display area and air-suction channel is produced with quality of AISI 304 stainless steel. That offers options of usage by adjustable block shelves. Lower basin has high inner capacity with its 300mm of height. That saves energy with night blind. Multi-functional electronic panel delivers comfort and easy to use. Protector PVC bumper on front panel.


GÜL PAKET ET - S

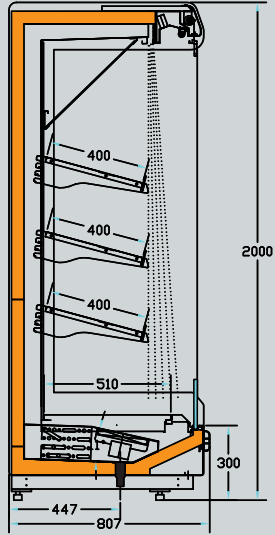


GÜL PAKET ET - M

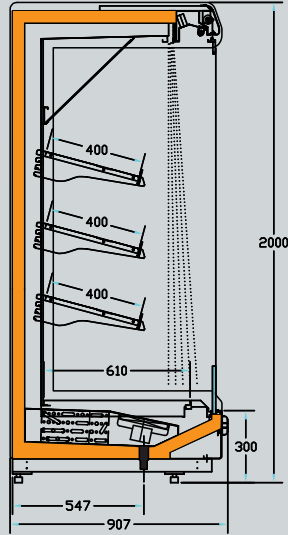


GÜL PAKET ET - L

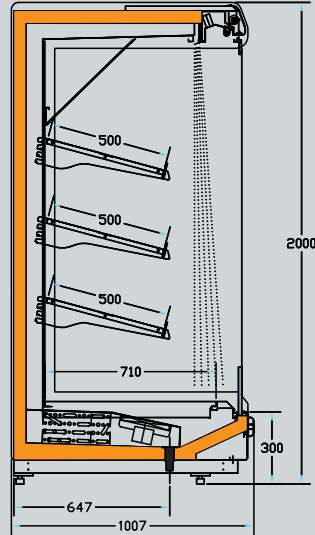



GÜL PAKET ET - HS

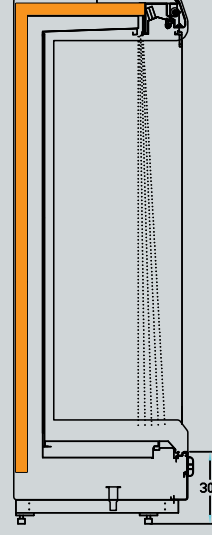

GÜL PAKET ET - HM

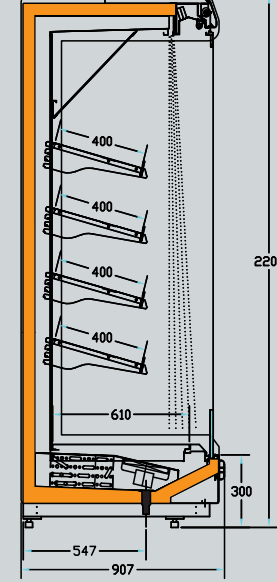

GÜL PAKET ET - HL

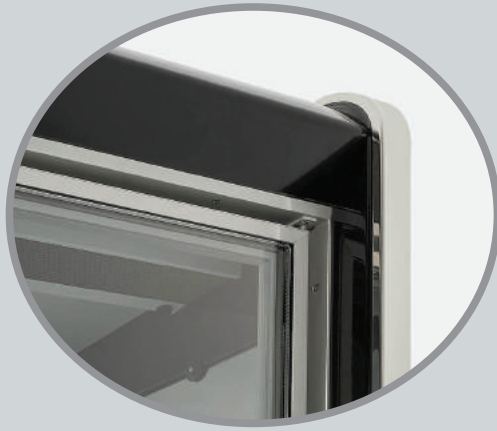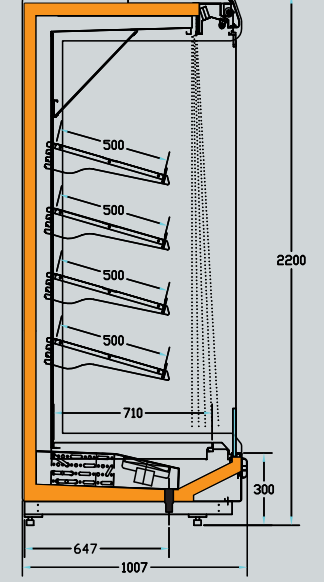

Model Ölçüleri Module Length	İklim Sınıfı Climate Class	Çalışma Sıcaklığı Working Temp	Çalışma Voltajı Working Voltage	Çalışma Frekansı Working Frequency	Besleme Gücü (Watt) Supply Power	Teshir Toplam Alanı Total Display Area (TTA) m2						Üründe raflarda vs. Azami yük (kg) Shelf Payload Capacity
						S	M	L	HS	HM	HL	
1250	3	-2 / 0 °C	230V	50-60 Hz	438	2,23	2,37	2,37	2,50	2,64	2,64	125 kg/metre
1875					707	3,27	3,46	3,46	3,66	3,86	3,86	
2500					1026	4,30	4,56	4,56	4,82	5,08	5,08	
2812					1083	4,82	5,11	5,11	5,40	5,69	5,69	
3125					1195	5,33	5,66	5,66	5,98	6,30	6,30	
3750					1414	6,37	6,75	6,75	7,14	7,52	7,52	

